Client Quantity Project Position

Pastry EN60x40 counter 3 doors

Model: TA17/1BJ-710

Cod: T20302000401



Technical data

| - | |
|--------------------------|---------------------------------|
| Тор: | With top and splashback |
| Gross capacity: | 607 lt |
| Temperature range: | -15°-22°C |
| Refrigerant unit: | Plug-In |
| Energetic class: | E |
| Energy efficiency index: | 78,7 |
| Annual consumption: | 3626 kW/h annum |
| 24h consumption: | 9,934 kW/h/24h |
| Climate class: | 5 |
| Cooling gas: | R290 |
| Defrost: | Hot gas |
| Body height: | 710 mm |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 2005×800×950 mm |
| Packing dimensions: | 2100×900×990 mm |
| Gross weight: | 185 Kg |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 850 W |
| Absorbed Current: | 3,9 A |
| Cooling capacity: | 569 W* |
| *: | Evap30°C Cond. +55°C |
| | |

Features

| Standard equipment: | 12 slides EN60x40 |
|------------------------------|---|
| Control: | Electronic, display flush with the panel |
| Doors: | 3 doors, self-closing, reversible with 105° stop |
| Door gasket: | Magnetic, triple chamber and easily replaceable |
| Insulation: | 60 mm thickness - CFC/HCFC free |
| Exterior/interior finishing: | Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel |
| Inner corners: | Rounded for easy cleaning and ensuring maximum hygiene |
| Handle: | Stainless steel AISI 304, 2 mm thick |
| Racks and slides: | Stainless steel AISI 304 |
| Feets: | Stainless steel AISI 304, adjustable h 100-150 mm |
| Cosmo: | Ready for connection to Cosmo Hub |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

coldline


Accessories and variants

| Drawers 1/2 | Aluminium coated backing-pan EN60x40 h 20 mm |
|------------------------------------|---|
| Drawers 1/3 | Stainless steel shelf EN60x40 |
| Drawers 1/3 + 2/3 | Plastic coated shelf EN60x40 |
| Technical compartment on the left | Pair of type L slides 605 mm |
| Lock with key for drawer 1/2 | IP44 schuko socket with cover |
| Lock with key for drawer 1/3 | Serial interface, RS485 cable |
| Lock with key for drawer 1/3 + 2/3 | Cosmo connection kit |
| RAL customisable colouring | Removable plinth EN 3D h 50 mm |
| Plug-in water unit | Removable plinth EN 3D h 100 mm |
| Power supply frequency 60Hz | Removable plinth EN 4D h 150 mm |
| Other special voltage | |
| Internal hygiene H3 | COSMO - wi-fi control |
| Granite flat worktop | |
| Granite worktop with splashback | Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Pastry counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of abnormal functioning. |
| Service water sink Ø 300 mm | |
| Single lever mixer hole Ø 3/4 | |
| Adjustable feet h 145/195 mm | |

*The installation requires a kit for the replacement of the racks

Technical draw

6 Swivel and brake castors h 128 mm

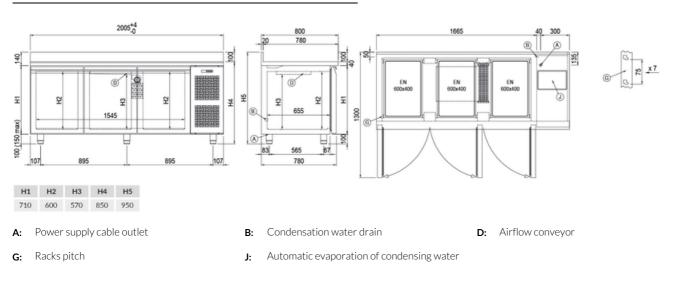

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.