Client _____ Quantity _____
Project _____ Position _____

Prep-station GN1/1 counter 2 doors

Model: TV13/1M-1/6-710 **Cod:** T10201000231

Technical data

Top:	With top
Gross capacity:	280 lt
Temperature range:	-2°+8°C
Refrigerant unit:	Plug-In
Cooling gas:	R290
Defrost:	Hot gas
Body height:	710 mm
Valve:	Supplied standard with solenoid
Dimensions:	1300×700×1005 mm
Packing dimensions:	1395×800×1050 mm
Gross weight:	145 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	250 W
Absorbed Current:	1,15 A
Cooling capacity:	406 W*
***:**	Evap. -10°C Cond. +55°C

Features

Standard equipment:	2 slides, 2 plastic coated GN1/1 shelves
Control:	Electronic, display flush with the panel
Doors:	2 doors, self-closing, reversible with 105° stop
Door gasket:	Magnetic, triple chamber and easily replaceable
Insulation:	60 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior interior and back in AISI 304 stainless steel. Base in colaminated steel
Inner corners:	Rounded for easy cleaning and ensuring maximum hygiene
Lid hinges:	Made on black plastic
Handle:	Stainless steel AISI 304, 2 mm thick
Racks and slides:	Stainless steel AISI 304
Feets:	Stainless steel AISI 304, adjustable h 100-150 mm
Cosmo:	Ready for connection to Cosmo Hub

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Accessories and variants

Drawers 1/2	GN1/2 container + lids kit for drawer, h 150 mm
Drawers 1/3	GN1/3 container + lids kit for drawer, h 150 mm
Drawers 1/3 + 2/3	Stainless steel shelf GN1/1
Special counter body heights 700 mm	Plastic coated shelf GN1/1
Special counter body heights 750 mm	Pair of type C slides 505 mm
Technical compartment on the left	Serial interface, RS485 cable
Special size of technical compartment	Cosmo connection kit
Lock with key for drawer 1/2	IP44 schuko socket with cover
Lock with key for drawer 1/3	Prep-Station pans kit GN1/6 plug-in, 2D
Lock with key for drawer 1/3 + 2/3	Removable plinth GN 2D h 50 mm
LED lighting	Removable plinth GN 2D h 100 mm
RAL customisable colouring	Removable plinth GN 2D h 150 mm
Plug-in water unit	
Power supply frequency 60Hz	
Other special voltage	
Adjustable feet h 145/195 mm	
4 Swivel and brake castors h 128 mm	
Brackets for GN pans for drawer	

COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect and monitor all Coldline appliances. Connect Prep-Station counters to a Cosmo hub (MODI, VISION or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of

*The installation requires a kit for the replacement of the racks

Technical draw

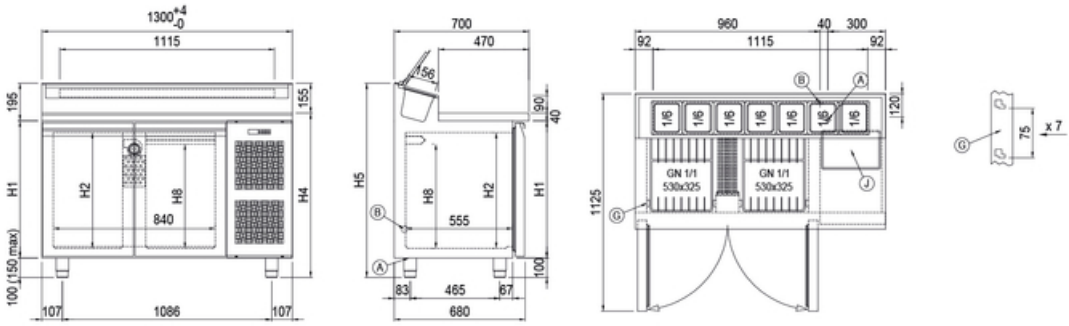

H1	H2	H4	H5	H8
710	600	850	1005	540

A: Power supply cable outlet

B: Condensation water drain

G: Racks pitch

J: Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.