



Client \_\_\_\_\_ Quantity \_\_\_\_\_  
 Project \_\_\_\_\_ Position \_\_\_\_\_

## Modi Up Blast Chiller

**Model:** W20UE

**Cod:** W21203000001

### Technical data

<b>Gross capacity:</b>	872 lt
<b>Temperature range:</b>	-40°+10°C
<b>Ventilation range:</b>	25% - 100%
<b>Humidifier:</b>	Not available
<b>Refrigerant unit:</b>	Plug-In
<b>Yield +90 / +3:</b>	88 Kg
<b>Yield +90 / -18:</b>	62 Kg
<b>Climate class:</b>	5
<b>Cooling gas:</b>	R452A
<b>Defrost:</b>	Forced air
<b>Valve:</b>	Electronic expansion valve
<b>Dimensions:</b>	810×1015×2210 mm
<b>Packing dimensions:</b>	830×1050×2250 mm
<b>Gross weight:</b>	225 Kg
<b>Voltage:</b>	400-415 V - 50-60 Hz
<b>Total rate:</b>	6450 W
<b>Absorbed Current:</b>	12,45 A
<b>Cooling capacity:</b>	7751 W*
<b>*:</b>	Evap. -10°C Cond. +45°C

### Features

<b>Functions:</b>	Blast chilling, shock freezing, continuous cycle
<b>Standard equipment:</b>	20 slides EN60x40
<b>Control:</b>	4,3" touch screen display with USB port
<b>Doors:</b>	Cushioned, with anti-odor system
<b>Door gasket:</b>	Magnetic, triple chamber and easily replaceable
<b>Core probe:</b>	Needle probe with 1 reading point, quick-release and easily replaceable
<b>Insulation:</b>	60 mm thickness - CFC/HCFC free
<b>Exterior/interior finishing:</b>	Exterior and interior AISI 304 stainless steel.
<b>Inner corners:</b>	Rounded for easy cleaning and ensuring maximum hygiene
<b>Handle:</b>	Stainless steel AISI 304, 2 mm thick
<b>Racks and slides:</b>	Stainless steel AISI 304, quick release
<b>Feets:</b>	Stainless steel AISI 304, adjustable h 100-150 mm
<b>Cosmo:</b>	Wi-Fi remote control system

## Accessories and variants


Sonda al cuore a 3 punti di lettura  
 Sonda al cuore riscaldata a 1 punto di lettura  
 Inversione apertura porta  
 Single-phase 50Hz power supply or 60Hz  
 Three phase 50Hz power supply or 60Hz  
 Power supply frequency 60Hz  
 Other special voltage  
 4 Swivel and brake castors h 128 mm  
 Aluminium coated backing-pan EN60x40 h 20 mm  
 Stainless steel shelf EN60x40  
 Plastic coated shelf EN60x40  
 Pair of type L slides 398 mm EN  
 Sterilizing UV lamp (U version)

## COSMO - wi-fi control

Cosmo is the wi-fi technology that allow to connect, update and monitor with a smartphone the MODI blast chiller. MODI is also a Cosmo hub and allow remote supervision of the Coldline devices connected to it.

\*The installation requires a kit for the replacement of the racks

## Technical draw

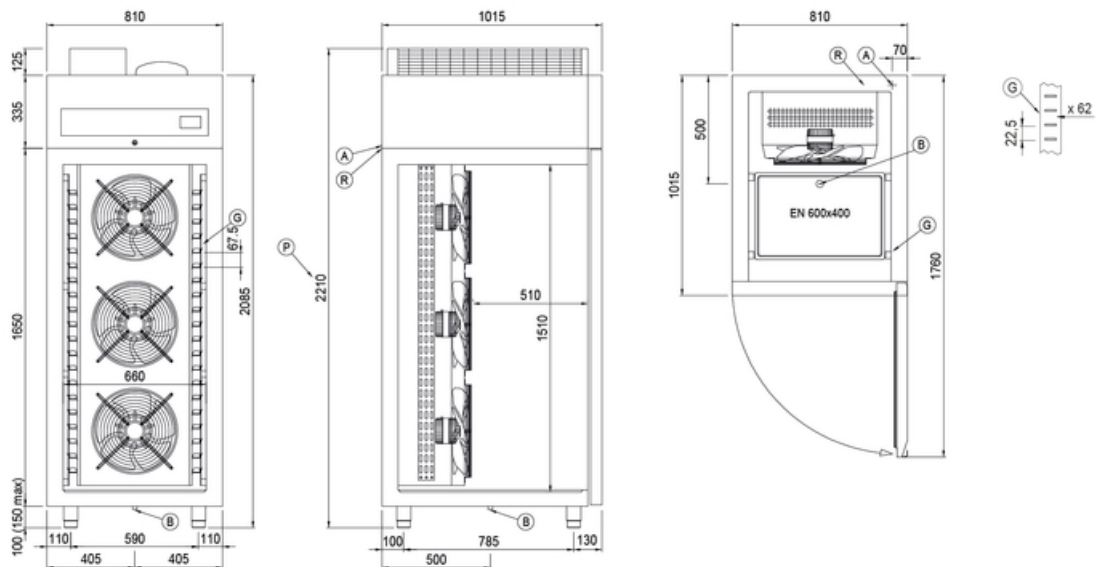

**A:** Power supply cable outlet

**B:** Condensation water drain

**G:** Racks pitch

**Q:** Plug-In

**R:** Gas output pipes

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.